



# *C3 AI Installation Guide – Amazon Web Services*

*Version 8.9*

*29 January 2026*

## Legal Notice

C3.ai products and services are sold subject to the C3.ai terms and conditions agreed at the time of purchase. Except as expressly permitted in that agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means the C3.ai products, services, or documentation.

The information contained herein is subject to change without notice, and is not warranted to be error-free. The information is provided by C3.ai "as-is" for informational purposes only, without representation or warranty of any kind, and C3.ai or its affiliated companies will not be liable for errors or omissions with respect to the information. The only warranties for C3.ai products and services are those that are set forth in the express warranty statements, if any, accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. If you find any errors, please report them to us in writing.

If this software or documentation is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, then use the following notice: "U.S. GOVERNMENT END USERS: C3.ai programs, including any integrated software, any programs installed on any hardware, and/or documentation, delivered to U.S. Government end users are "commercial computer software" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, use, duplication, disclosure, modification, and adaptation of the programs, including any operating system, integrated software, any programs installed on the hardware, and/or documentation, shall be subject to license terms and license restrictions applicable to the programs. No other rights are granted to the U.S. Government."

C3.ai materials are not intended for use in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control systems, life support machines or other equipment in which the failure of the C3.ai materials could lead to death, personal injury, or severe physical or environmental damage. C3.ai disclaims any and all liability arising out of, or related to, any such use of the C3.ai materials.

Information contained in this document regarding third party product or services does not constitute a license from C3.ai to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property rights of the third party. C3.ai is not responsible for and expressly disclaims all warranties of any kind with respect to third-party content, products, and services. C3.ai is not responsible for any loss, costs, or damages incurred due to the access to or use of third-party content, products, or services, except as set forth in a written agreement between you and C3.ai.

Any software coding samples included in this documentation are examples only and are not intended to be used in a production environment. The code is provided "as-is" and use of any code is at your own risk. C3.ai does not warrant the correctness or completeness of the code given herein, and C3.ai is not liable for errors or damages caused by usage of the code.

The business names used in this documentation are fictitious and are not intended to identify any real companies currently or previously in existence.

C3 AI, C3.ai, and the C3.ai logos are trademarks or registered trademarks of C3.ai, Inc. in the United States and/or other countries. All other product names, trademarks, and registered trademarks are the property of their respective owners.

## Table of Contents

<i>C3 AI Deployment Options: Guidance for Enterprise Customers</i> .....	3
1. C3 AI SaaS / PaaS Subscription (Preferred Standard Option) .....	4
2. Customer-Hosted, C3 AI-Managed Deployment.....	4
Summary Table .....	5
<i>C3 AI Installation Requirements for Amazon Web Services</i> .....	7
Required Amazon cloud services .....	8
Amazon cloud access requirements .....	9
Network configuration .....	12
<i>HashiCorp Terraform Configuration</i> .....	16
Getting started.....	16
<i>Installation Steps</i> .....	17
1. Create the VPC and required AWS services .....	19
2. Grant C3 AI Operations access to EKS as a Kubernetes administrator.....	22
3. Validate the VPC and configuration of required AWS services .....	24
4. Complete Installation.....	26

# C3 AI Deployment Options: Guidance for Enterprise Customers

C3 AI offers flexible deployment models to meet the diverse needs of enterprise customers. Selecting the appropriate deployment option is a critical decision that impacts project timelines, service-level agreements (SLAs), and roles and responsibilities (RACI). This document outlines each option, highlights key considerations, and underscores the benefits of the C3 AI SaaS/PaaS Subscription, which is the recommended approach for most organizations.

## 1. C3 AI SaaS / PaaS Subscription (Preferred Standard Option)

### Overview:

The standard C3 AI SaaS/PaaS (Software as a Service / Platform as a Service) subscription is the most typical deployment option to leverage the C3 AI Platform and Applications. It is a fully hosted and managed service by C3 AI in Amazon Web Services (AWS). Customers may select their preferred AWS region for data residency.

### Key Features and Benefits:

- **Lower Total Cost of Ownership (TCO):**  
Standardized technologies and processes enable rapid deployment, streamlined support, and efficient issue resolution. C3 AI maintains specific enterprise SLAs to deliver an industry-leading service with lower TCO.
- **Reduced Operational Burden:**  
Internal teams can focus on leveraging AI applications for business value, rather than managing infrastructure setup and maintenance.
- **Scalability:**  
The SaaS/PaaS model supports seamless scaling as business needs evolve. C3 AI manages all scaling needs and capacity planning required to ensure consistently available platform and applications.
- **Security and Compliance:**  
C3 AI employs industry standard cybersecurity and access control practices to safeguard customer applications and data. C3 AI holds and maintains critical compliance attestations like SOC2, ISO27001, and FedRAMP.

### Why Choose SaaS/PaaS?

This model is the fastest, most cost-effective way to realize value from C3 AI products and generate AI-driven insights. It is recommended for organizations seeking minimal operational overhead and maximum agility.

## 2. Customer-Hosted, C3 AI-Managed Deployment

For organizations with non-standard data residency, security, or governance requirements, C3 AI supports deployments within a customer's own Amazon Virtual Private Cloud (VPC). C3 AI Operations manages the deployment, maintenance, and support within the customer's environment. Your organization will have responsibility for portions of the infrastructure to ensure C3 AI Operations can successfully deploy and manage C3 AI Products. Coordination with C3 AI Operations will be required for future upgrades, change, and incident management activities. Additional charges may apply to support a customer-hosted deployment.

### Key Considerations:

- **Customer Responsibilities:**
  - Provision and secure the Amazon Virtual Private Cloud (VPC) according to internal policies.
  - Provide timely and required access to C3 AI Operations for installation and ongoing support.
  - Manage and troubleshoot infrastructure changes outside C3 AI's control that may affect availability or performance.
  - Assume all infrastructure hosting costs within the customer's cloud account.
- **Control and Access:**  
Customers retain greater control and thus greater responsibility over their AWS subscription and can limit permissions granted to C3 AI.

### When to Choose This Option:

This model is suitable for organizations with:

- Internal processes requiring direct control over cloud resources.
- Policies with non-standard local data residency, security, or governance requirements.

## Summary Table

Deployment Model	Managed By	Hosted In	Customer Responsibilities	Recommended For
<b>SaaS/PaaS Subscription (Preferred)</b>	C3 AI	C3 AI AWS Cloud	Minimal	Most organizations
<b>Customer-Hosted, C3 AI-Managed</b>	C3 AI	Customer Amazon Virtual Private Cloud (VPC)	VPC provisioning, access, infra costs	Regulated/controlled industries

Selecting the right deployment option is essential for project success. C3 AI strongly recommends the SaaS/PaaS Subscription for most enterprises, as it maximizes value, reduces risk, and accelerates time-to-insight.

If you have questions or require a tailored recommendation, please reach out to your C3 AI representative.

## Customer Hosted Install Requirements: Checklist

### Summary

For C3 AI to operate in customer-hosted AWS Cloud accounts, your organization must meet the following requirements consistently throughout the contract term. Deviations from the installation requirements incur additional operational fees.

You agree that your organization will allow C3 AI Operations to deploy all infrastructure required to support the C3 AI applications and platform per this specification and utilizes C3 AI deployment automation. This checklist only applies to customer hosted installations.

### Installation and Operational Management Checklist

For C3 AI Operations to deploy a cluster in a customer-hosted deployment, you must provide the following access, network setup, and infrastructure to C3 AI:


1. An IAM role called C3.AdminOps with temporary administrator privileges to a dedicated Azure subscription, AWS account, or GCP project so that C3 AI can perform tasks to set up your deployment.

C3 AI requires administrator privileges to set up an IAM policy and create a role that allows C3 AI Operations to perform installation, setup, and deployment tasks. You can remove administrator access after initial setup and may need to provide administrator access again to support new product releases.

2. An IAM role called C3.Ops with access to your dedicated AWS account, Azure subscription, or GCP project so that C3 AI can manage infrastructure.
3. If your firewall settings prevent C3 AI Operations from configuring access to required endpoints, you must allow access to the following:
  - a. Routing to and from the C3 AI network so C3 AI can receive metrics, logs, and observability data to operate the deployment.
  - b. Connectivity to endpoints that allow C3 AI product functionality.
4. New VPC and subnet with at least 1024 IP address (/22) available for C3 deployment. Each subnet must be across three availability zones.
5. Static DNS entry for C3 AI URL (for example, c3project.customer.com).
6. Private and public key (and the certificate chain if necessary) from the x509 certificate. C3 AI does not support self-signed certificates or certificates signed by an internal Certificate Authority. You must provide a certificate from a public Certificate Authority.

## C3 AI Installation Requirements for Amazon Web Services

The C3 Agentic AI Platform integrates with core AWS services like Amazon EC2, VPC, and IAM, enabling cohesive security and infrastructure management. The platform also supports AWS-native tools such as Amazon S3 bucket for durable backups.

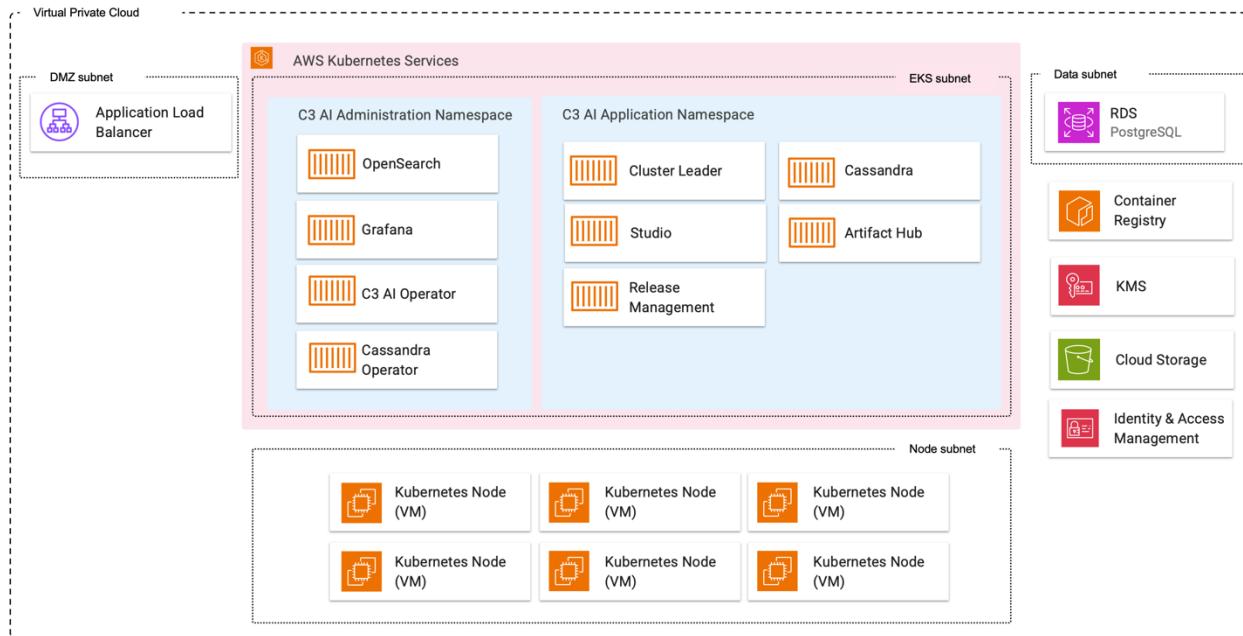

*Figure 1. AWS Architecture with C3 Agentic AI Platform Deployment*

The C3 Agentic AI Platform requires specific AWS cloud services and infrastructure for successful deployment, as well as specific access requirements for C3 AI Operations to install, administer, and upgrade the C3 Agentic AI Platform and C3 AI Applications.

Install and upgrade requirements including Bill of Materials (BOM) details can be reviewed on the documentation site <https://docs.c3.ai/versions-and-compatibility/upgrade-requirements/8.9>.

The following sections describe the specific services and access needs, including network configurations and subnet requirements, security group egress and ingress rules, and subnet-level access control lists (ACLs).

## Required Amazon cloud services

The table below describes the Amazon cloud infrastructure services required by the C3 Agentic AI Platform. You are required to provide the services below configured to C3 AI specifications as documented in the HashiCorp Terraform scripts.

Amazon Cloud Service	Version	Description
Elastic Kubernetes Engine (EKS)	1.34	Operating environment responsible for the deployment, scaling, and management of the C3 Agentic AI Platform and C3 AI Applications.
Secrets Manager	Current version	Scalable, centralized, fast cloud key management.
RDS (PostgreSQL)	15	Relational database service (RDS) required for internal operations of the C3 Agentic AI Platform.
S3	Current version	Reliable and secure object storage used for the management of application and platform configuration and other ancillary tasks.
Identity and Access Management (IAM)	Current version	Fine-grained access control and visibility for centrally managing cloud service account resources.
Virtual Private Cloud (VPC)	Current version	Dedicated, isolated network for inter-C3Cluster communication.
EC2	Current version	Compute instances required by Amazon EKS.

## Amazon cloud access requirements

The table below describes the access requirements for C3 AI Operations to install, administer, and upgrade the C3 AI Applications and C3 Agentic AI Platform.

To ensure security, operational excellence, and customer trust, C3 AI leverages an industry standard privileged access management (PAM) for infrastructure access and authentication. All access by our C3 AI Operations team to customer hosted deployments will be managed exclusively through this PAM solution. This approach ensures every interaction with the systems is secure, fully auditible, and aligned with industry best practices.

Why PAM and what this means for you:

- **Centralized Access Control:** All infrastructure access is managed through a single, secure platform, reducing complexity and risk.
- **Enhanced Security:** PAM enforces strong authentication and zero-trust principles, ensuring only authorized personnel can access your systems.
- **Full Auditability:** Every session and command is logged, providing complete visibility for compliance and security reviews.
- **Rapid Access Revocation:** Access can be granted or revoked instantly, minimizing exposure during personnel changes or incident response.
- **Operational Efficiency:** Our Operations team benefits from streamlined workflows, reducing time-to-resolution for support and maintenance tasks.
- **Industry Best Practices:** PAM aligns with leading security frameworks and compliance standards, reinforcing trust and reliability.

Requirements of the PAM solution:

- One time use of an IAM role to deploy the cluster and for select infrastructure upgrades
- Service account created in your SSO / Active Directory used to manage the C3 AI Platform

C3 AI Operations will deploy and install the PAM solution. You can request an audit log of user access by contacting C3 AI Customer Support.

Access Requirements	Description
A dedicated Amazon sub account	When creating the project, C3 AI requires: (1) Account identifier, (2) Cloud region.
IAM user account for each C3 AI Operations member	<p>C3 AI Operations personnel must be granted IAMReadOnlyAccess and IAMUserChangePassword managed policies.</p> <p>You must create a role called C3.Ops in your AWS deployment. Add the IAM policy specifications defined in the HashiCorp Terraform scripts.</p>
AWS roles	<p>Provide C3 AI Operations access to the AWS roles CLUSTERNAME-rsgp-c3-01 and CLUSTERNAME-c3-privileged.</p> <p>Map the CLUSTERNAME-c3-privileged AWS role to the C3 AI Kubernetes service account c3-privileged. See <a href="#">Map Cloud Provider Identity to Kubernetes Service account</a>.</p>
Secure internet access to the Amazon sub account	Secure, remote access via internet (VPN access is acceptable) to a bastion host from which C3 AI Operations personnel can administer cloud infrastructure and C3 AI services.
A bastion host accessible by C3 AI Operations to manage the cluster	The bastion host will be used by C3 AI Operations to administer the C3 AI Applications and C3 Agentic AI Platform. Software utilities required to be installed on the bastion host must include: RedHat 8, <a href="#">AWS Command Line Interface</a> (CLI) latest version, <code>kubectl</code> v1.34, <code>Helm</code> v3.12+, HashiCorp Terraform (>=1.13.0), Python 3.12, and Docker.
Access to C3 AI third-party library and image repositories	Access to C3 AI and third-party repositories for the container images, Python libraries, NodeJS libraries, and runtime billing data collection. If connecting to remote C3 AI, Python, and NodeJS artifact repositories violates security standards, the C3 Agentic AI Platform can be configured to connect to local artifact repositories (such as, AWS Container registry, JFrog, and Anaconda Enterprise).
X.509 certificate for terminating network encryption	<p>A fully qualified domain name for C3 Cluster ingress configuration (for example, c3project.customer.com). You are responsible for providing the private and public key (and the certificate chain if necessary) from the x509 certificate to C3 AI. These are placed in a Kubernetes secret and used by C3 AI cluster ingress controller.</p> <p>C3 AI does not support self-signed certificates or certificates signed by an internal Certificate Authority. You must provide a certificate from a public Certificate Authority.</p>

## Network configuration

To deploy the C3 Agentic AI Platform in your own VPC, you must create the VPC following the requirements enumerated in VPC requirements section below.

### VPC requirements

Your VPC must meet the requirements described in this section to host a C3 AI cluster.

#### VPC region

The Amazon region where the deployment will occur. Refer to AWS documentation for a list of available regions.

#### VPC sizing

The C3 Agentic AI Platform requires two (2) CIDR blocks.

IP Address Range	Description
/22 range	Private IPs that are routable to a public-facing Internet Gateway; used by RDS (Postgres), EKS Cluster, and node pools.
172.0.0.0/16	Non-routable space, used by EKS pods.

The VPC must have DNS hostnames and DNS resolution enabled.

#### Subnets

C3 AI must have access to at least 12 subnets for each cluster with each subnet in a different availability zone. The subnets are:

- Three (3) DMZ public subnets for load balancing (one subnet per availability zone)
- Three (3) data private subnets for Postgres (one subnet per availability zone)
- Three (3) EKS private subnets for the EKS cluster (one subnet per availability zone)
- Three (3) EKS Pod private non-routable subnets for pods running in the EKS cluster (one subnet per availability zone)

Each subnet must have a netmask between /15 and /22.

For EKS deployment, C3 AI configures two non-overlapping network address spaces. The primary virtual network (VNet) uses the address space 10.0.0.0/22. For the Kubernetes

pod and service networks, we use secondary CIDR ranges of 172.18.0.0/15 and 172.16.0.0/18, respectively.

## Subnet route table

The route table for workspace subnets must have quad-zero (0.0.0.0/0) traffic that targets the appropriate network device.

## Additional subnet requirements

- Subnets must have outbound access to the public network using a NAT gateway and internet gateway, or other similar customer-managed appliance infrastructure.
- The NAT gateway must be set up in its own subnet that routes quad-zero (0.0.0.0/0) traffic to an internet gateway or other customer-managed appliance infrastructure.

## Security groups

C3 AI must have access to at least one AWS security group and no more than five security groups. You can reuse existing security groups rather than create new ones.

Security groups must have the following rules.

### Endpoint access

If your firewall settings prevent C3 AI Operations from configuring endpoint access, you must allow outbound access to the following endpoints to allow C3 AI product functionality:

- api.github.com
- codeload.github.com
- Cloudfront.net
- conda.anaconda.org
- docker.io
- files.pythonhosted.org
- github.com
- grafana.com
- Huggingface.co
- jfrog.c3.ai
- nodejs
- npmjs.com
- prdgkemis.c3.ai (if MIS access is needed)
- pypi.org
- pypi.python.org
- quay.io

- registry.c3.ai
- registry.npmjs.org
- repo.anaconda.com
- repo.continuum.io
- telemetry.c3.ai
- vault.c3iot.io

You must allow outbound access to the following endpoints for C3 AI Monitoring. These IP addresses collect standard operational metrics:

- 44.230.42.147/32
- 54.187.151.165/32

You must allow inbound access to the following C3 AI Operations endpoints to operate the deployment:

- 12.226.154.130/32
- 13.214.249.29/32
- 18.136.19.189/32
- 34.231.113.223/32
- 34.232.23.54/32
- 34.238.215.224/32
- 34.82.144.175/32
- 52.48.79.190/32
- 54.76.64.220/32
- 70.35.33.244/32

### Egress (outbound)

- Allow all TCP and UDP access to the workspace security group (for internal traffic)
- Allow TCP access to 0.0.0.0/0 for these ports:
  - 443: for C3 AI infrastructure, cloud data sources, and library repositories

### Ingress (inbound)

- Allow all TCP and UDP access to the workspace security group (for internal traffic)
- 443: for C3 AI application access
- 22: for SSH access to a bastion host

### Subnet-level network ACLs

Subnet-level network ACLs must not deny ingress or egress to any traffic.

- ALLOW ALL from Source 0.0.0.0/0. This rule must be prioritized.
- Egress:
  - Allow all traffic to the C3 AI cluster VPC CIDR, for internal traffic.
  - Allow TCP access to 0.0.0.0/0 for these ports:
    - 443: for C3 AI infrastructure, cloud data sources, and library repositories.

## HashiCorp Terraform Configuration

HashiCorp Terraform is a popular open-source tool for creating safe and predictable cloud infrastructure across several cloud providers. Terraform scripts are used to create the cloud infrastructure required by the C3 Agentic AI Platform and automate the deployment of the C3 Agentic AI Platform in your AWS account.

**NOTE:** For C3 AI customer-managed deployments, any customization performed on the Terraform scripts must be reapplied with each version of the Terraform scripts from C3 AI.

## Getting started

In this section, you install and configure requirements to use Terraform. You then configure Terraform authentication. Following completion of this section, you go to the “Installation Steps” section below to deploy and configure the cloud infrastructure required by the C3 Agentic AI Platform.

### Requirements

To use Terraform to create cloud infrastructure resources required by the C3 Agentic AI Platform in your AWS account, you must have the following:

- An AWS account.
- On your local development machine, you must have:
  - The HashiCorp Terraform CLI. See [Install Terraform](#) on the Terraform website to download the binary of the required Terraform version specified in the `main.tf` file example in the “Installation Steps” section below. Select AMD64 or ARM64 depending on the which matches the client hardware from which you will run the Terraform scripts.
  - The [AWS CLI](#)
  - The `eksctl` command-line tool. See [Install eksctl](#) on the Amazon EKS website.

- Privileges to deploy, operate, and delete the infrastructure services. See the “README.md” file in the downloaded Registry folder for the most up-to-date information.
- The following environment variables:
  - AWS\_ACCESS\_KEY\_ID, set to the value of your AWS user’s access key ID. See [Programmatic access](#) in the AWS General Reference.
  - AWS\_SECRET\_ACCESS\_KEY, set to the value of your AWS user’s secret access key. See [Programmatic access](#) in the AWS General Reference.
  - AWS\_REGION, set to the value of the AWS Region code for your AWS account. See [Regional endpoints](#) in the AWS General Reference.

## Installation Steps

Installation of the C3 Agentic AI Platform on AWS is a multi-step process due to limitations of Terraform and AWS-specific configuration requirements. The installation process is the following:

1. Create the VPC and required AWS services.
2. Grant C3 AI Operations access to EKS as a Kubernetes administrator.
3. C3 AI Operations installs and configures required EKS options.
4. Update your EKS node pool configuration.
5. Validate the VPC and configuration of required AWS services.
6. C3 AI Operations completes the installation of the C3 Agentic AI Platform.

To create a VPC, C3 AI requires the use of HashiCorp Terraform and will provide a set of Terraform scripts to assist you in the creation of the VPC and required AWS Services. If you are unfamiliar with Terraform, review their [Get Started – AWS](#) documentation.

**NOTE:** See the “HashiCorp Terraform Requirements” section above to ensure all requirements are met prior to completing the installation steps below.

A description of the Terraform modules is below. See the README.md file in the downloaded Registry folder for the most up-to-date information.

Terraform Module	Description
bootstrap	Configures the necessary IAM roles and policies to allow a Terraform orchestrator to deploy all services required by the C3 Agentic AI Platform on AWS.

Terraform Module	Description
c3cluster	Coordinates the execution of all other Terraform modules.
eks-addons	This module will deploy and configure EKS managed add-ons
eks-cluster	Configures AWS Elastic Kubernetes Service (EKS), including VPC configuration, endpoint access, authorized IP addresses, and the version of Kubernetes used by the cluster.
eks-nodepool	Configures the AWS EKS node groups, including default instance size, required subnet, and permissions assigned to each node.
firewall	Configures ingress and egress security rules.
iam	Configures the required IAM roles and policies.
kms	Configures the AWS Key Management service.
network	Configures the VPC, including public and private subnets, internet gateway, CIDR blocks, DHCP, and NAT.
postgres	Creates an AWS RDS database and assigns the database to the database subnet.
vault	Seeds the application role and secret in the AWS Secrets Manager.
S3	This module configures the AWS S3 buckets to be used with the C3 AI cluster.

In addition to the required tools listed in the “HashiCorp Terraform Requirements” section, install TFSwitch, which is a tool used to switch easily between Terraform versions.

See [Install TFSwitch](#) and [TFSwitch Quick Start](#) on the TFSwitch website for more information.

## 1. Create the VPC and required AWS services

This guide shows you how to create the cloud infrastructure services required by the C3 Agentic AI Platform using HashiCorp Terraform on AWS.

**NOTE:** During initial infrastructure deployment, make sure to leave all node pool node counts to 0.

## 1.1 Run the bootstrap module

This module creates the necessary IAM roles and policies to configure the VPC and required AWS services. Configure a new `main.tf` file below, replacing the CAPITALIZED variable names with your values.

**NOTE:** The cluster name must adhere to the following restrictions:

- For Dev and QA clusters: <stg><cloud><customerabbreviation>; in which <cloud> is aws. For example, `stgawscust`
- For Production clusters: <prd><cloud><customerabbreviation>; in which <cloud> is aws. For example, `prdawscust`
- The cluster name should not include a hyphen and must start with a letter; only lowercase letters and numbers are allowed with no other special characters or diacritics (accented letters); and should be less than 15 characters total.

**NOTE:** For more configuration options, download the Terraform module from the C3 AI Registry folder provided by C3 AI, and view the “Inputs” section in the main `README.md` file.

```
module "bootstrap" {
  source      = "<c3_url>/tf-registry__c3/aws/c3//modules/bootstrap"
  version     = "VERSION_NUMBER"
  cluster_name = "CLUSTER_NAME" # Replace with Name of c3 deployment
  account_id   = "AWS_ACCOUNT_ID"
  region       = "REGION"

  # Trusted identities ARN who will be allowed to assume the infrastructure creation role
  trusted_identifier_arns = ["TRUSTED_IDENTITY_ARN"]
}

provider "aws" {}

terraform {
  required_version = ">=1.13.0"
  required_providers {
    aws = {
      source  = "hashicorp/aws"
      version = "6.28.0"
    }
  }
}
```

**NOTE:** Replace:

- `CLUSTER_NAME` with the name of the C3 AI cluster. The cluster name must adhere to the following restrictions:

- For Dev and QA clusters: <stg><cloud><customerabbreviation>; in which <cloud> is aws. For example, stgawscust
- For Production clusters: <prd><cloud><customerabbreviation>; in which <cloud> is aws. For example, prdawscust
- The cluster name should not include a hyphen and must start with a letter; only lowercase letters and numbers are allowed with no other special characters or diacritics (accented letters); and should be less than 15 characters total.
- VERSION\_NUMBER with the version of the bootstrap module listed on the C3 AI BOM for the release version.
- TRUSTED\_IDENTITY\_ARN - List of AWS accounts and IAM users who are authorized to manage C3 infrastructure.

## 1.2 After configuring the **main.tf** file, run the following Terraform commands from the same directory

```
tfswitch
terraform init
terraform plan --out out.plan
terraform apply "out.plan"
```

NOTE: If you receive a “Command not found: Terraform” after running the commands above, the `terraform` binary might not be in your path. See the [Get Started in AWS – Install Terraform](#) page on the HashiCorp Terraform website for more information.

## 1.3 Run the **c3cluster** module

This module coordinates execution of all other Terraform modules. Configure a new `main.tf` in a separate directory from the bootstrap module, replacing the CAPITALIZED variable names with your values. Note that you must assume the `IAM_ROLE_NAME` role created by the bootstrap module, which is typically formatted as follows:  `${CLUSTER_NAME}_c3icrole-01` in the default Terraform scripts. For more details see <https://repost.aws/knowledge-center/iam-assume-role-cli>.

Contact your account manager for the list of IP addresses required by C3 AI. These values will be used to update the `ip_allowlist` section below.

**NOTE:** C3 AI requires a set of CIDR blocks to be whitelisted for C3 AI Operations to deploy the C3 Agentic AI Platform.

**NOTE:** C3 AI infrastructure Terraform modules create a new VPC and subnets. If your organization must separately create these network artifacts, the Terraform module can be

© 2026 C3.ai, Inc. All rights reserved. No part of this publication may be reproduced or transmitted in any form or for any purpose without the express permission of C3.ai.

modified to utilize them rather than create new ones. For details, refer to the examples/existing\_network/README.md file contained in the Terraform module documentation.

```

module "c3cluster" {
  source = "<c3_url>/tf-registry__c3/aws/c3"

  version      = "VERSION_NUMBER"
  cluster_name = "CLUSTER_NAME" # Replace with Name of c3 deployment
  c3_region    = "REGION"

  # Please reach out to c3 CoE to obtain the list of IPs to whitelist
  ip_allowlist = [
    {
      cidr_blocks = [
        "CIDR_TO_WHITELIST",
      ],
      display_name = "WHITELISTED_CIDR_NAME"
    }
  ]

  # Please reach out to c3 CoE to obtain the list of Domains to whitelist
  for CORS
  s3_cors_domains = ["http://*.DOMAIN_NAME"]

}

provider "aws" {}

terraform {
  required_version = ">=1.13.0"
  required_providers {
    aws = {
      source  = "hashicorp/aws"
      version = "6.28.0"
    }
  }
}

```

NOTE: Replace:

- CLUSTER\_NAME with the name of the C3 AI cluster. The cluster name must adhere to the following restrictions:
  - For Dev and QA clusters: <stg><cloud><customerabbreviation>; in which <cloud> is aws. For example, stgawscust
  - For Production clusters: <prd><cloud><customerabbreviation>; in which <cloud> is aws. For example, prdawscust

- The cluster name should not include a hyphen and must start with a letter; only lowercase letters and numbers are allowed with no other special characters or diacritics (accented letters); and should be less than 15 characters total.
- VERSION\_NUMBER with the version of the `c3cluster` module listed on the C3 AI BOM for the release version.

### 1.3.1 Implement CORS policy for C3 AI Ex Machina

If the installation of the C3 Agentic AI Platform includes C3 AI Ex Machina, setting the C3 AI CORS domain is all that is necessary. The CORS policy facilitates file uploads for C3 AI Ex Machina.

See `storage_cors_domains` in the `main.tf` example above.

Also, see the `cors_rules.tf` template example in the Terraform modules for more configuration details.

After creating the **main.tf** file, run the example below from the same directory as the **main.tf** file

```
tfswitch
terraform init
terraform plan --out out.plan
terraform apply "out.plan"
```

## 2. Grant C3 AI Operations access to EKS as a Kubernetes administrator

### 2.1 Create and attach policy to C3 AI Operations IAM users giving permissions to assume the Infrastructure Management IAM role and generate kubeconfig

Create the policy by doing the following:

1. In the AWS Identity and Access Management (IAM) dashboard, go to IAM > Policies.
2. In the Permissions tab, select Create Policy to enter the following JSON.

**NOTE:** See the `iam_policies.tf` template example in the Terraform modules for more configuration details.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "Statement1",
      "Effect": "Allow",
      "Action": [
        "sts:AssumeRole"
      ],
      "Resource": [
        "arn:aws:iam::ACCOUNTID:role/CLUSTER- c3icrole-01"
      ]
    },
    {
      "Sid": "ManageOwnAccessKeys",
      "Effect": "Allow",
      "Action": [
        "iam:CreateAccessKey",
        "iam:DeleteAccessKey",
        "iam:GetAccessKeyLastUsed",
        "iam:GetUser",
        "iam>ListAccessKeys",
        "iam:UpdateAccessKey",
        "iam:TagUser"
      ],
      "Resource": "arn:aws:iam::ACCOUNTID:RESOURCE_TYPE"
    }
  ]
}
```

**NOTE:** Replace:

- CLUSTER with the name of the EKS cluster. The cluster name must adhere to the following restrictions:
  - For Dev and QA clusters: <stg><cloud><customerabbreviation>; in which <cloud> is aws. For example, `stgawscust`
  - For Production clusters: <prd><cloud><customerabbreviation>; in which <cloud> is aws. For example, `prdawscust`
  - The cluster name should not include a hyphen and must start with a letter; only lowercase letters and numbers are allowed with no other special characters or diacritics (accented letters); and should be less than 15 characters total.
- REGION with AWS region code associated with the EKS cluster.
- ACCOUNTID with ID of the AWS account that owns the resource, without the hyphens. For example, `123456789012`.
- RESOURCE\_TYPE with user, group, or the resource type to be assigned to the user. Use the value set in Step 2.1.

Attach the JSON policy to the C3 AI Operations IAM user by doing the following:

**NOTE:** Contact the CoE for the specific C3 AI Operations IAM users that need to be added.

1. In the Entities Attached tab, select IAM Users from the Entity Type drop-down menu, and enter the applicable Entity Names.
2. Then, click Attach Policy.

Once creation of the EKS identity mapping is complete, notify C3 AI Operations and they will complete the configuration of the AWS CNI driver for Kubernetes, EBS CNI driver, Kubernetes Autoscaler, Kubernetes Metrics Server, and the Calico network policy engine for EKS.

## 3. Validate the VPC and configuration of required AWS services

After the VPC and required cloud services are configured, you are required to execute the C3 AI Cluster Validation Utility and provide the results to C3 AI. If all checks performed by the C3 AI Cluster Validation Utility pass, the VPC is suitable for C3 AI Operations to deploy the C3 Agentic AI Platform on the Kubernetes cluster.

**NOTE:** If the cluster validation utility fails, you must remediate all exceptions. All checks must pass for C3 AI Operations to be able to deploy the C3 Agentic AI Platform on your Kubernetes cluster. See the next section for details.

Once the checks are successfully completed, provide C3 AI Operations access to the cluster. Refer to the subsequent section for more information.

### 3.1 Run the C3 AI Cluster Validation Utility and provide results to C3 AI Operations

Contact the C3 AI Center of Excellence (CoE) for more information and to obtain the C3 AI Cluster Validation Utility.

Run the C3 AI Cluster Validation Utility to determine whether the infrastructure requirements are fulfilled to allow the C3 AI Operations to deploy the C3 Agentic AI Platform.

If the C3 AI Cluster Validation Utility indicates the VPC is ready for C3 AI Operations to deploy the C3 Agentic AI Platform on the Kubernetes cluster, provide the output to C3 AI Operations.

If the output indicates the VNet is not ready, remediate all exceptions and rerun the C3 AI Cluster Validation Utility.

## 3.2 Provide C3 AI Operations access to the cluster

In addition to the output of the C3 AI Cluster Validation Utility, you must provide C3 AI Operations with the following.

Title	Description
C3 AI Operations credentials	Credentials for C3 AI Operations team members.
EKS cluster name	<p>By default, CLUSTER-kube-01. Confirm this in the AWS console by going to “Elastic Kubernetes Service” and identifying the newly created cluster.</p> <p><b>NOTE:</b> The cluster name must adhere to the following restrictions:</p> <ul style="list-style-type: none"> <li>• For Dev and QA clusters: &lt;stg&gt;&lt;cloud&gt;&lt;customerabbreviation&gt;; in which &lt;cloud&gt; is aws. For example, stgawscust</li> <li>• For Production clusters: &lt;prd&gt;&lt;cloud&gt;&lt;customerabbreviation&gt;; in which &lt;cloud&gt; is aws. For example, prdawscust</li> <li>• The cluster name should not include a hyphen and must start with a letter; only lowercase letters and numbers are allowed with no other special characters or diacritics (accented letters); and should be less than 15 characters total.</li> </ul>
Region	The AWS region associated with the EKS cluster
Role-Arn to get Kubeconfig	The ARN of the role created in Step 3; likely, arn:aws:iam::ACCOUNTID:role/C3_CLUSTER_ID-kubeconfig-01. Copy it from IAM → Roles → find the role you created previously.
AWS Postgres endpoint	From AWS console, go to RDS Services, locate <C3_CLUSTER_ID>-pg-shared and provide the Endpoint value for the instance.
AWS Postgres Admin password (after changing it)	From RDS services, locate <C3_CLUSTER_ID>-pg-shared and hit the Modify button at the top right. Configure a new password by pressing “Auto generate a password” or by filling in new password and take note of it. Or, if you do not have permissions to do so, run aws rds modify-db-instance --db-instance-identifier --master-user-password <pwd> as the role C3_CLUSTER_ID-c3icrole-01
EKS Pod Subnets with Availability Zones	Go to VPC → Subnets. Search for subnets with name having a prefix of C3_CLUSTER_ID-sn-ekspod, taking note of the Subnet ID and Availability Zone of each one.
EKS security group ID	Go to VPC → Security Groups. Search for security groups with a prefix of C3_CLUSTER_ID-sg-eks - this should show one security group. Take note of its Security group ID.

Title	Description
S3 Bucket name	By default, ACCOUNTID--CLUSTERNAME. Confirm this in the AWS console by going to S3 and identifying this bucket.
Domain name	A fully qualified domain name for C3 AI Cluster ingress configuration (for example, c3project.customer.com)
Public and private key	The private and public key (and the certificate chain if necessary) from the x509 certificate. This will be required for ingress configuration.

## 4. Complete Installation

C3 AI Operations completes the installation of the C3 Agentic AI Platform.

With the infrastructure properly configured and EKS node pool configuration updated, C3 AI Operations will continue with the installation of the C3 Agentic AI Platform.

At the conclusion of the VPC creation and the deployment of the C3 Agentic AI Platform, the AWS Cloud environment will resemble the following.

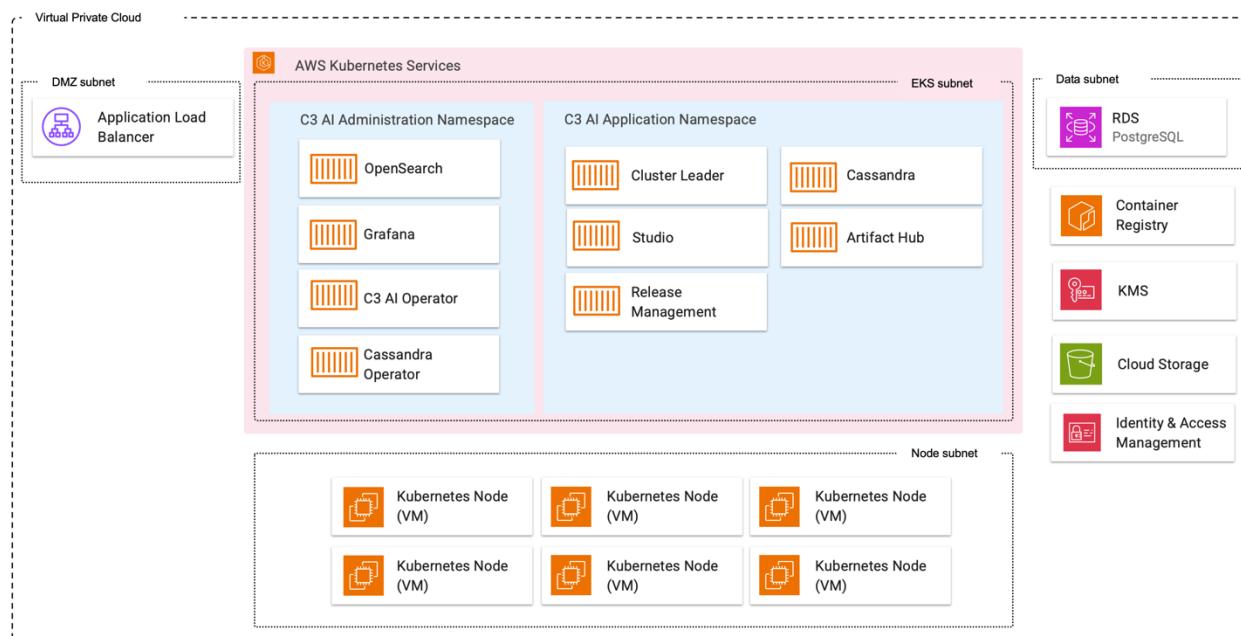


Figure 2. AWS Architecture with C3 Agentic AI Platform Deployment